TOCTOU 2892860

FIGURE 1

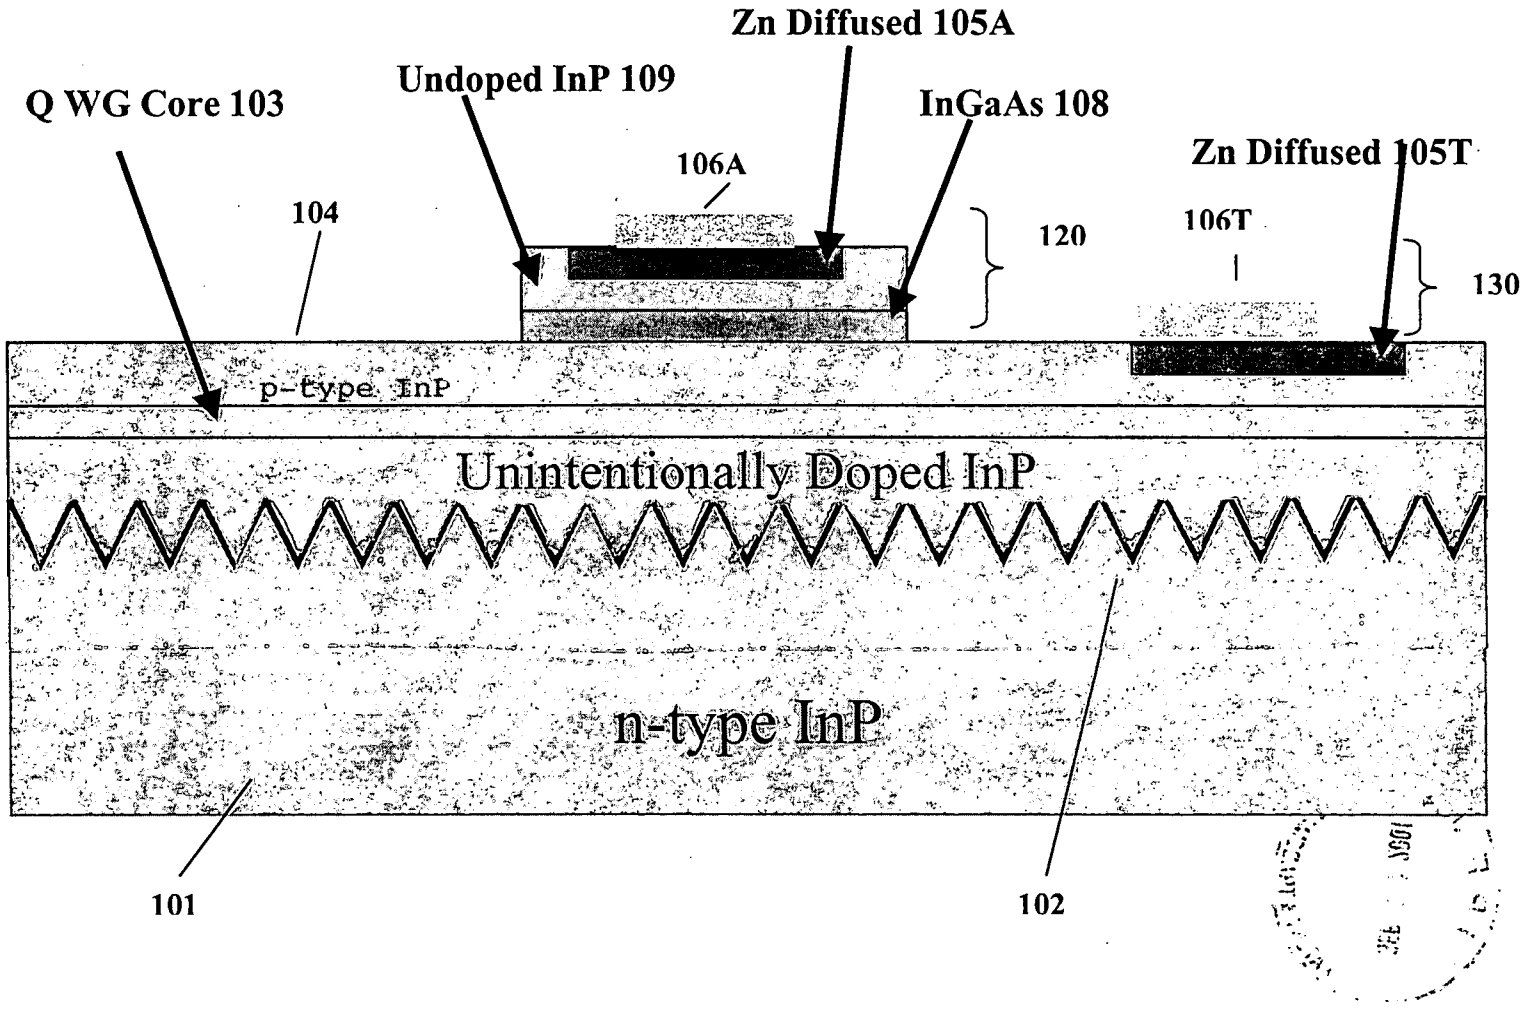

FIGURE 2

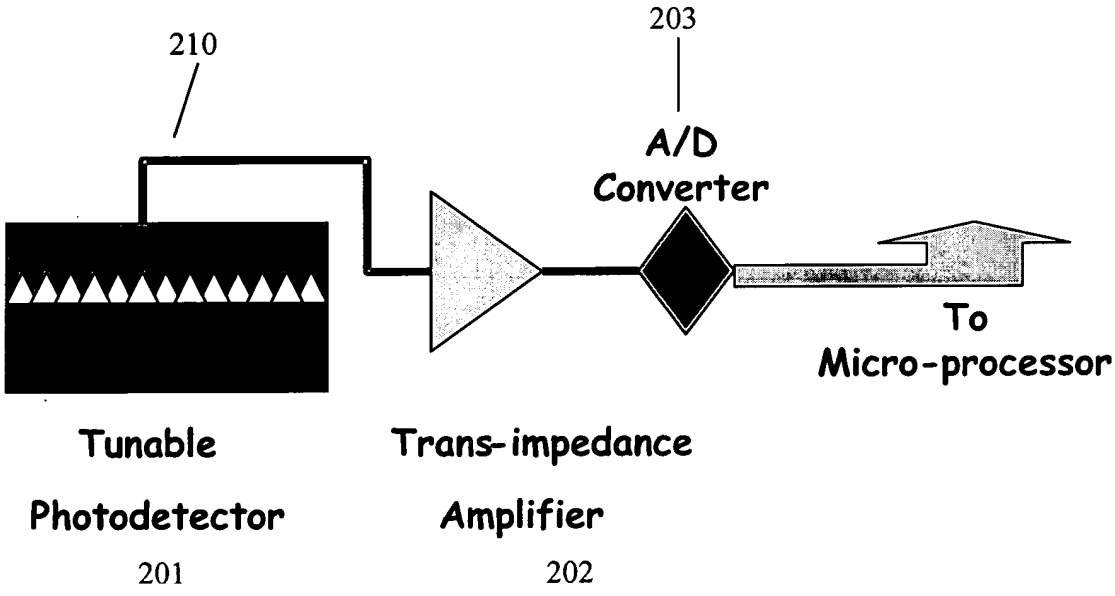
210
203
A/D
Converter
To
Micro-processor
Tunable
Photodetector
201
Trans-impedance
Amplifier
202

FIGURE 3

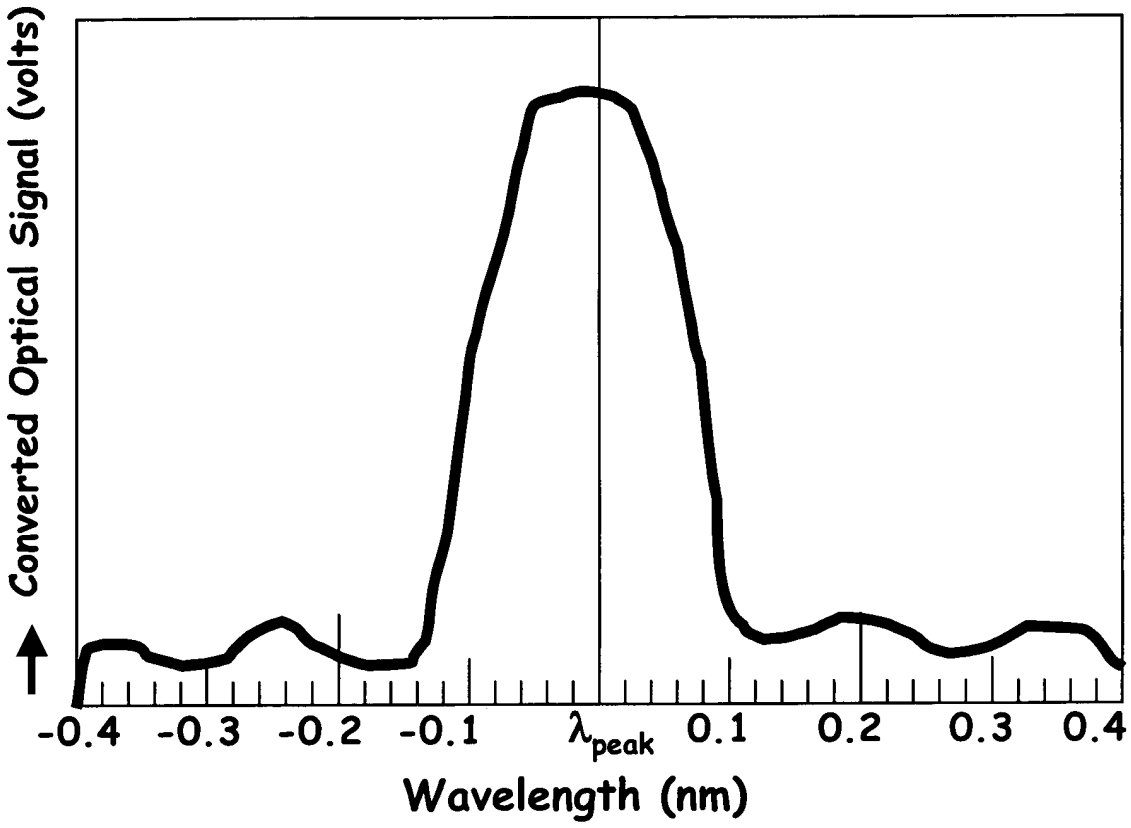
Converted Optical Signal (volts)
-0.4
-0.3
-0.2
-0.1
λpeak
0.1
0.2
0.3
0.4
Wavelength (nm)

EP 2 750 269 A1

FIGURE 3A

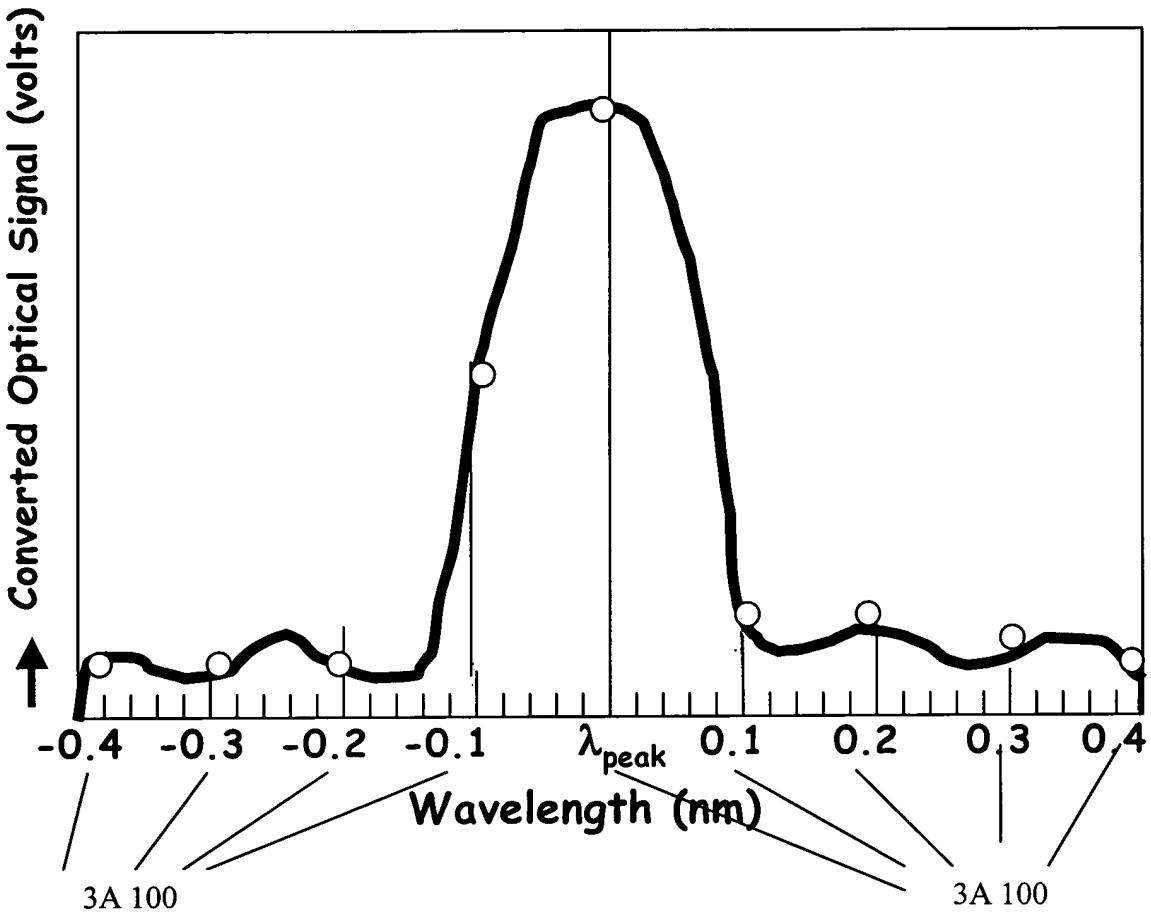

FIGURE 3B

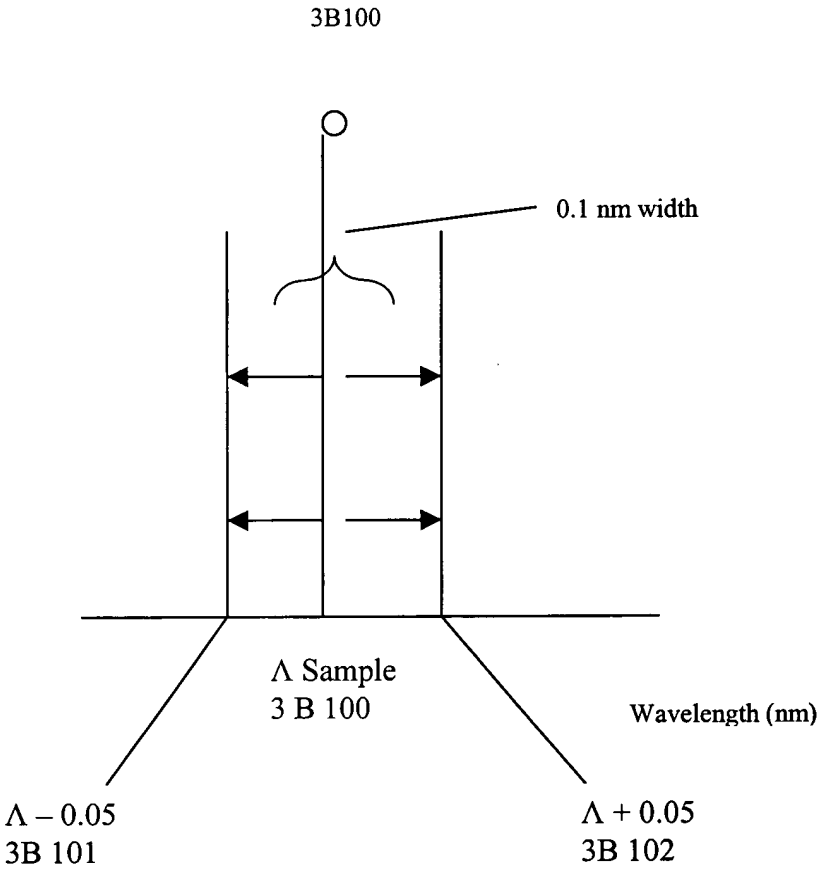
3B100
0.1 nm width
Λ Sample
3 B 100
Wavelength (nm)
Λ – 0.05
3B 101
Λ + 0.05
3B 102